

General Surveillance Management Centre



Features

- Embedded device, 30*24 stable operation
- High-performance stream media transfer and storage capability
- Support distribute and cascade deployment
- Support hot standby
- Support local storage and IP-SAN storage
- Support GIS map(Google, RasterMap)
- Support ONVIF standard protocol connection
- Support platform SDK
- Support POS function
- Support People Counting Statistic
- Support VDP, through SIP Server

Performance


- Support 200 IP devices and 1000 channels
- Support unlimited accounts management and 8000 online users
- Support 300M transfer capability
- Support 100M local storage capability
- Support 20 distributes server and 5-level cascade
- E-map max displays 200-channel on one screen
- Process 1000-channel alarm per second.

Specification

Model		DHI-DSS4004
System	Main Processor	64 bit 4 core CPU
	OS	Embedded LINUX
	Fan	Low noise fan cooling, support 7x24 work
	Memory	4GB server
	Chassis	1.0mm SGCC steel plate
	Local System Setting	Network configuration
Display Port	HDMI	2 HDMI, 1 as network config, 1 as spare.
	VGA	1 VGA, as network config.
Data Management	HDD Installation	Built-in 1 1T corporate hard disk.
Port	Network Port	4 100/1000Mbps Ethernet ports
	RS232	Reserved
	RS485	Reserved(reusable with alarm port)
	USB Port	Front: 2 3.0, rear 2 2.0, motherboard loads 1 USB2.0
Other	Power	100V~240V, 47~63Hz
	Consumption	35W~50W (with HDD)
	Working Environment Temperature	0°C~50°C
	Working Environment Humidity	5%~90% (non-condensation)
	Storage Environment Temperature	-20°C ~ + 70°C
	Storage Environment Humidity	5%~90% (non-condensation)
	Working Altitude	-60m~3000m
	Dimensions	440 (W) *43.65 (H) *398.7mm
	Weight (without package)	4.5Kg
	Installation Method	Standard 19 inch rack installation



- | | |
|-----------------|----------------------|
| 1- Power Button | 4- HDD status |
| 2- USB3.0 | 5- Alarm Indicator |
| 3- USB3.0 | 6- Network Indicator |

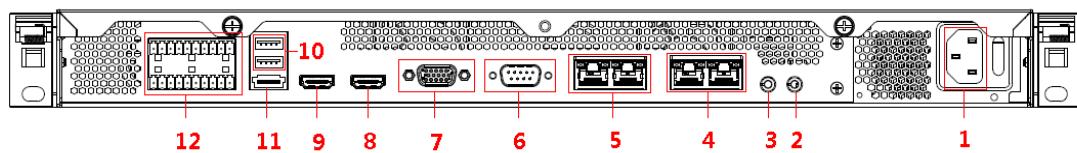

- | | | | |
|--------------------|------------------------|---------------------|---------------------|
| 1- Power Interface | 4- Ethernet Port 1~2 | 7- Video VGA Output | 10- USB2.0×2 |
| 2- Audio Output | 5- Ethernet Port 3~4 | 8- HDMI1 | 11- eSATA Interface |
| 3- Audio Input | 6- RS232 Interconnects | 9- HDMI2 | 12- Alarm In & Out |

Dahua Technology Co., Ltd.

1187BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email:overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.